


Switching PCIe Bracket

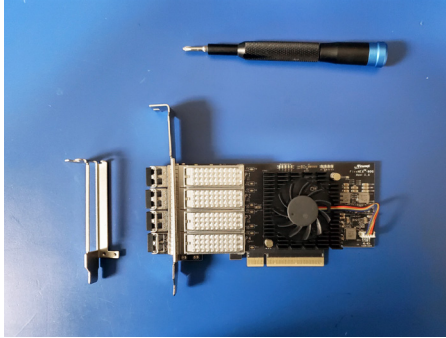


Tools Needed:
1x Crosshead Screwdriver


Directions:

1. Remove all transceivers from the cage.


Note: Lower metal tab in order to pull out transceiver.

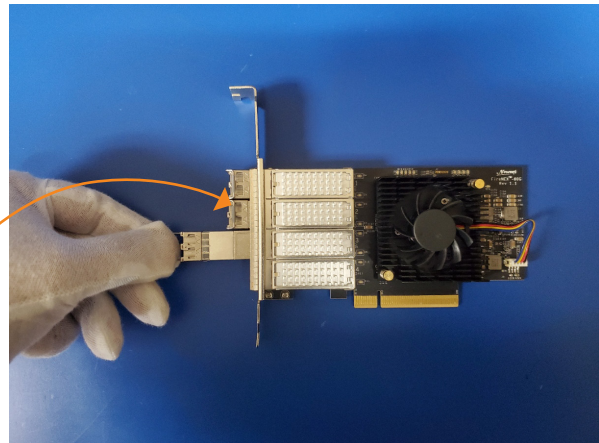


2. Unscrew the two mounting screws.

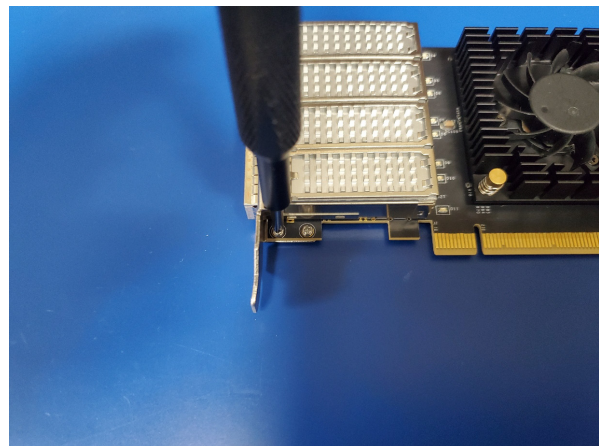

3. Carefully remove the PCIe bracket.

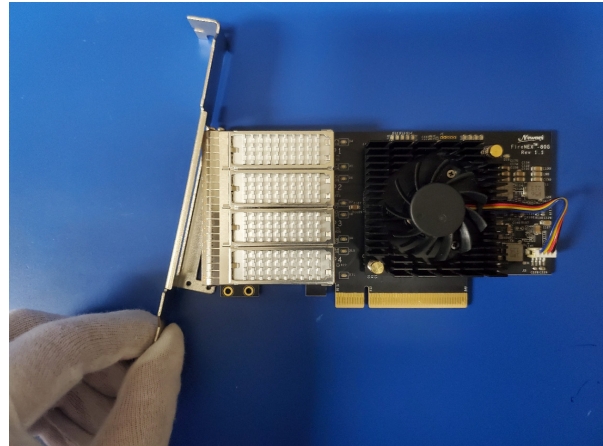

4. Insert the desired length PCIe bracket you are trying to switch. Ensure the two screw holes on the bracket are in line with the holes on the board.

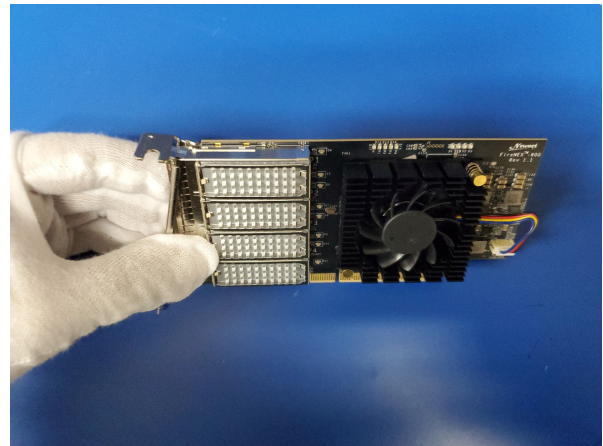

5. Tighten the two mounting screws.

To complete the mounting process, install the PCIe adapter into the computer chassis for use.

